




WHEN PERFORMANCE COUNTS...

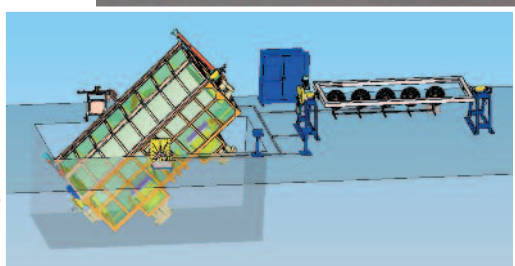

ROCKING OVEN MACHINES

The RotoSpeed™ Rocking Oven is designed to produce long, slender products. The machines can accept a single part up to the maximum dimensions or multiple parts. Each machine is provided with one oven station, and one cooling/load/unload station. Product uniformity is assured by a highly-efficient oven.

RotoCure Process Management System is standard on all RotoSpeed Rocking Oven machines. RotoCure, the most flexible rotational molding control system in the industry, is used on the Windows® 7 format to provide unprecedented control features for RotoSpeed™ rotational molding machines.

ROTO SPEED®
ROTATIONAL MOLDING MACHINES

 A PRODUCT OF FERRY INDUSTRIES, INC.

ROCKING OVEN MACHINES


FERRY RotoSpeed Rocking Oven Style ROTATIONAL MOLDING MACHINES



RotoSpeed RO-7410/3050 Rocking Oven Machine



*Rocking Action up to
45° each direction*

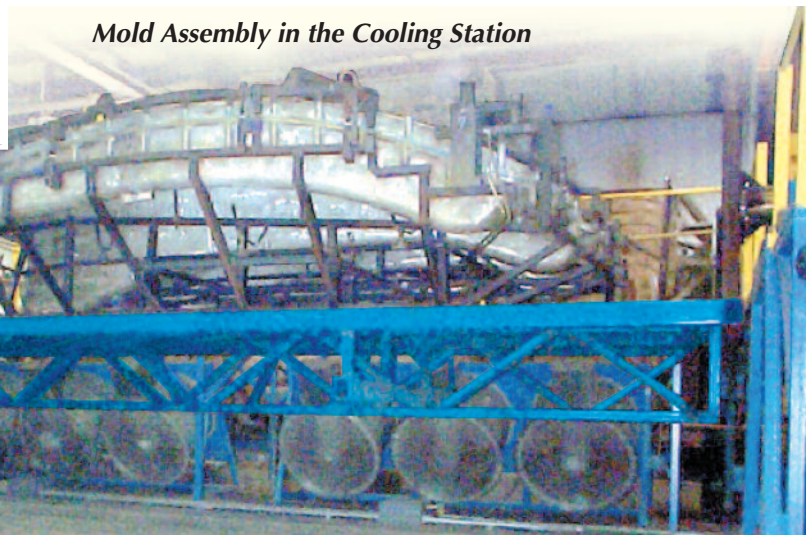

Mold Assembly in the Cooling Station



*RotoCure™ Process
Control Management*

5 Standard sizes of Rocking Oven Machines available.

Lifting Lid Model	Mold Length inches/mm	Swing Diameter inches/mm	Weight Capacity lbs./kg
RO-6400/1900	252/6400	75/1905	3000/1362
RO-5300/2400	210/5334	95/2413	3000/1362
RO-6400/2400	252/6400	95/2413	3000/1362
RO-6700/2400	264/6705	95/2413	3000/1362
RO-7410/3050	292/7416	120/3050	9000/4082



4445 Allen Rd. • Stow, OH 44224-1093 • U.S.A. • Phone: 330.920.9200 • Fax: 330.920.4200
Web: www.ferryindustries.com • E-Mail: sales@ferryindustries.com

Note: Specifications subject to change without notice. © 2017 FERRY INDUSTRIES, INC.

